


RIM MAXIMUM PRESSURE RATING CHART

Tire Width (A)		Clincher rim internal width (B)					Rim maximum pressure rating (C)	
(mm)	(inch)	23 - 26mm	27 - 30mm	31 - 34mm	35 - 38mm	39 - 45mm	(bar)	(psi)
38	1.5	●					4.5	66
42	1.7	●					4.1	60
44	1.8	●	●				3.9	56
48	1.9	●	●				3.6	52
51	2.0	●	●	●			3.4	49
53	2.1	●	●	●			3.2	47
57	2.25		●	●	●		3.0	44
60	2.35		●	●	●		2.9	42
61	2.4		●	●	●	●	2.8	41
64	2.5			●	●	●	2.7	39
66	2.6			●	●	●	2.6	38
69	2.7				●	●	2.5	36
71	2.8				●	●	2.3	34
74	2.9					●	2.1	31
76	3.0					●	2.0	29

● - Permitted Combination (also check with tire manufacturer for permitted rim width and type)

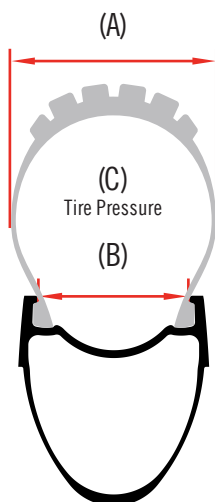

A. Refer to technical information on tires.

EXAMPLE: 29 x 2.25

B. Refer to technical information on Race Face rims.

EXAMPLE: 622 x 30

B. For conventional tire systems (tubetype, tubeless ready).

The tire pressure must stay within the tire manufacturer's specified pressure, but never exceed the rim maximum pressure rating specified by Race Face.